

CHULIING
Thermoforming and Cutting machine

精密油壓自動送料截斷機
Precision Hydraulic Automatic
Feeding Cutter

C55-806/806A/202/706



Noiseless · High Speed
Accurate
High Performance

CHU LIING MACHINERY CO., LTD

精密油壓自動送料截斷機

Hydraulic Automatic Feeding Cutter

單邊送料為標準機種，可選配為雙邊送料


Single-sided feeding is standard type. Double-sided feeding is optional.

靜音 · 快速 · 精準 · 高效率 / Noiseless · High Speed

CSS-806A

精密油壓雙邊四柱式自動送料截斷機

Precision Hydraulic Four Column Type Automatic Feeding Cutter

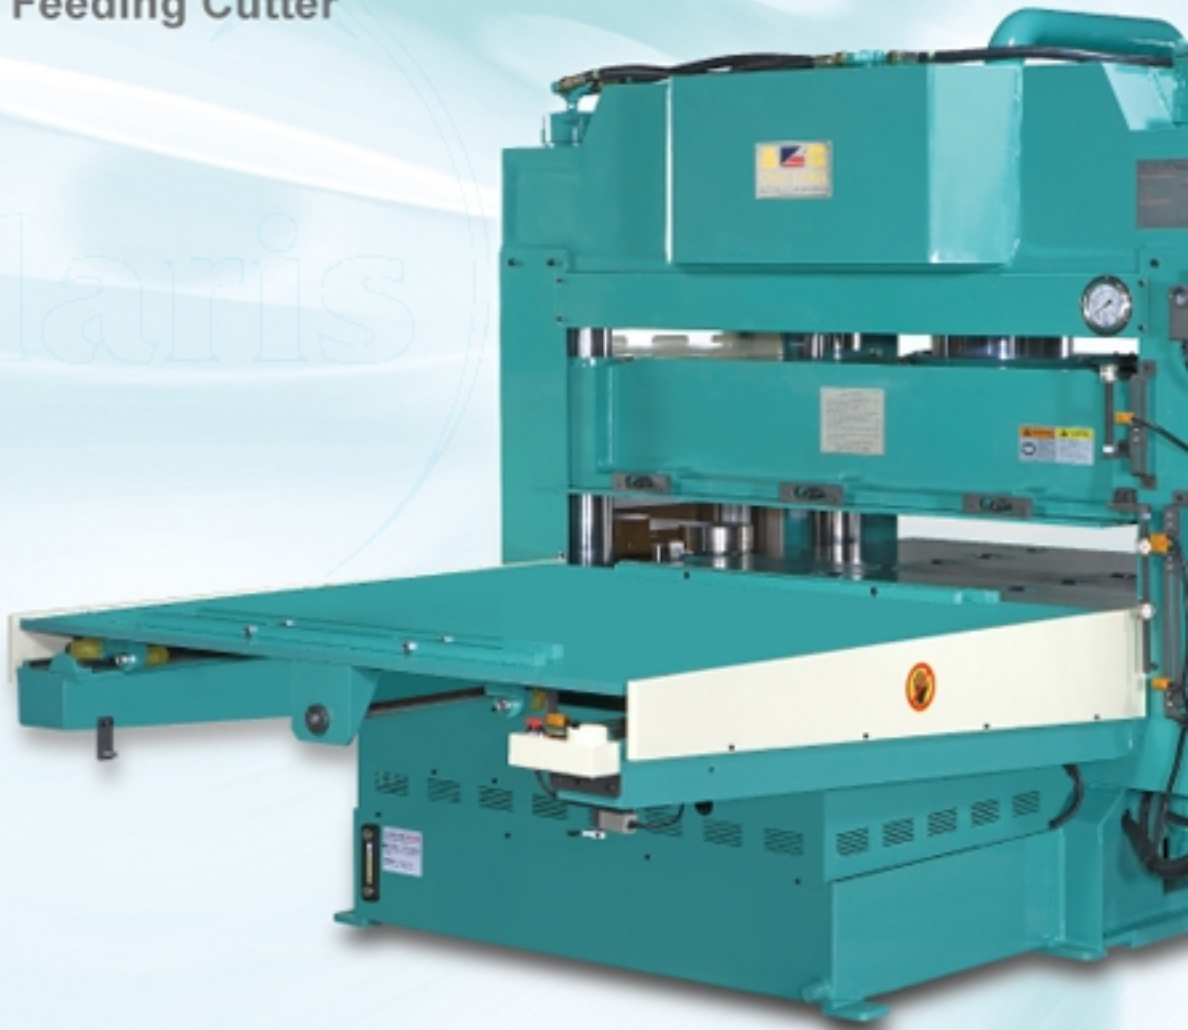

Precision

F E A T U R E S

特點

- 雙單邊操作，省時省力，一機兩用超越生產效果。
- 雙邊壓力和觸摸式電子計數表個別分開，大小不一之產品均可使用。
- 超精度的油路設計，可使動作輕巧無聲每個動作定位穩定，可延長機件、刀模壽命，附有精緻斬板旋盤裝置，可減少斬板損耗。
- 機身結構使用高張力鋼板製成，在經過應力消除過程，歷久彌新，永不變形。（特殊規格歡迎訂做）
- Both double-side and single-side operation, time and manpower saving, one machine for two purposes to give excellent effect of production.
- Double-side pressure and touch-type electronic counter watch are separately devised, so different sizes of product can be adopted.
- Super precision oil way design, silent for performance, stable locating for each action, to increase the service life of parts and tool mold devised with cutting board rotary table, the consumption of cutting board can be reduced.
- Body frame adopts high tension steel plate under stress relief process for long application without being deformed. (We welcome any special size from buyer)

適用 Usage

文具、真空成型、雙泡殼、鞋類、EVA發泡免洗餐具、拼圖、皮革、塑膠地磚、油封……等各種成型截斷。

Cutting for stationery, vacuum shaping, double-blister, footwear, EVA foaming disposal dinner set, combination drawing, leather, plastic brick, and oil seal etc. various goods.

Option:

Precision cutting depth adjustment device.

Feature:

1. The consumption of mould and cutting board can be reduced at least 50%.
2. Cutting depth can be controlled at the same point each cutting process.

選配功能：

精密裁斷深度微調裝置。

特點：

1. 可提升刀模及斬板壽命50%以上。
2. 裁斷深度重現性100%。


Feeding Cutter

Feeding is optional.

Accurate · High Performance

CHULING
Thermoforming and Cutting machine

CSS-806 精密油壓雙邊自動送料截斷機 Precision Hydraulic Double-Sided Auto Feed Cutter

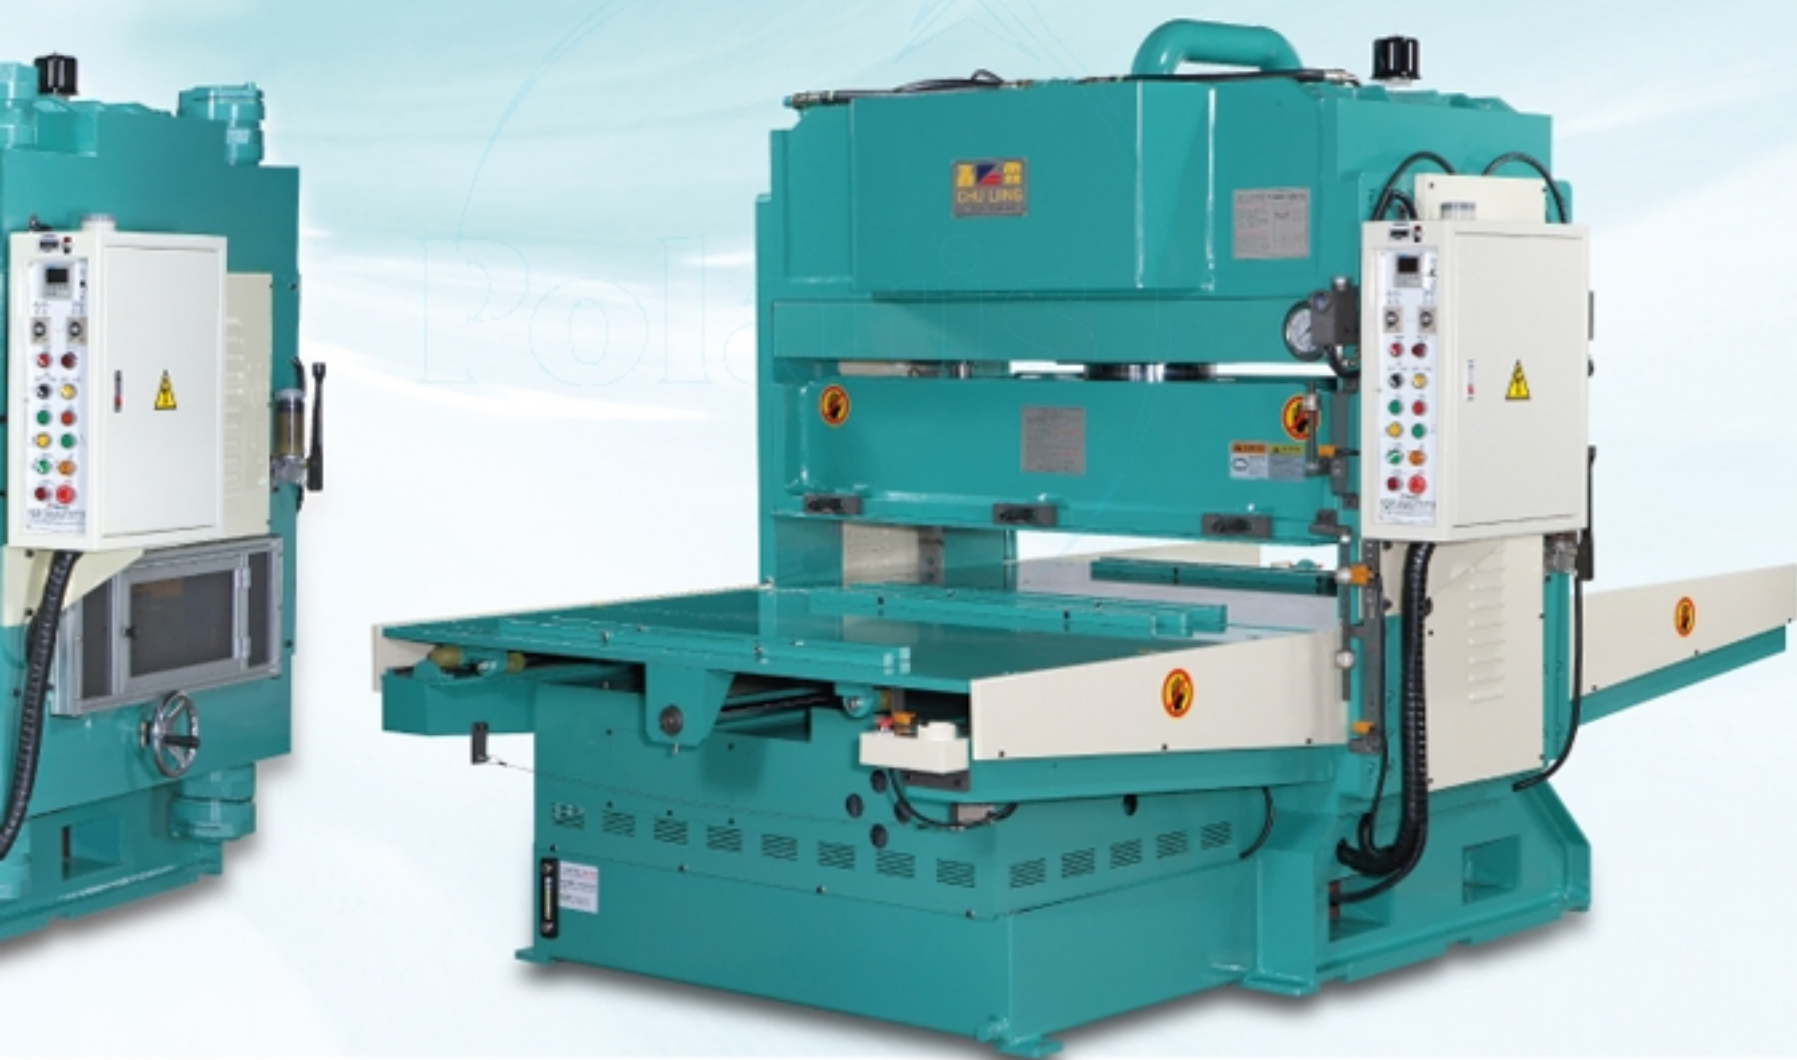

● 規格 Specifications

型 式 Model	CSS-806-1	CSS-806-2	CSS-806-3
壓 力 Pressure	170 tons	190 tons	210 tons
馬 力 Horse Power	7.5HP	7.5HP	10HP
有效面積 Effective Area LxW	1400x740mm	1550x840mm	1700x840mm
機械尺寸 Dimensions of Machinery LxWxH	1800x2670x2200mm	2090x3160x2212mm	2050x2870x2200mm
裝箱尺寸 Packing Size LxWxH	2005x2750x2350mm	2170x3240x2362mm	2255x2850x2350mm
沖 距 Pressing Distance	5-250mm	5-250mm	5-250mm
淨 重 N.W. (Apr.)	約7800kg	約8200kg	約8600kg
毛 重 G.W. (Apr.)	約8200kg	約8800kg	約9200kg
送料方式 Feeding Way	前進Forward · 下壓Down pressing · 上昇Up · 退後Back · 取料Feeding		





精密高速油壓自動截斷機

High speed Hydraulic Automatic Cutters

FEATURES

● 特點

- 本機採用雙手按鈕，操作安全，速度快、平穩、壓力特強無噪音、無震動力，樓上、樓下廠房均能使用，故障率低，提高生產效率。
- 刀模自動設定：衝程簡單、快速、準確，延長刀具及斬刀板壽命。
- 自動潤滑系統：使用中機件能自動加油，確保機械不受損，永保精密度。
- 可任意調整多層單層之裁斷。
- 本機附設煞車裝置，確保人員安全。
- 特殊機種均可訂做。
- Adopts of either hand press or foot step for operation. High speed, stable, strong pressure, noiseless & without vibration force, to be applied for upstairs & downstairs plants with low rate of malfunction and high working efficiency.
- Automatic stroke setting for cutter die; simple, high speed, accurate to extend the life of cutter and cutter plate.
- Automatic lubricating system to lubricate the components while in operation so as to secure the machine with good precision and without damage.
- Cutting to multi-layer or single-layer can be adjusted at free will.
- It has equipped with brake device to secure the safety of the operator.
- Special models are available to be custom-made on request.

● 適用 Usage

高級皮革製品、帽子、洋傘、鞋類、玩具、人造花、非金屬材料成型裁斷作業。

For shoes, hats, bags, leather bags, toys, artificial flowers, etc.

靜音 · 敏捷 / Quietly · Nimble

CSS-202



● 規格 Specifications

型 式 Model	CSS-201	CSS-202
壓 力 Pressure	20 tons	25 tons
馬 力 Horse Power	3HP	5HP
有效面積 Effective Area LxW	1280x410mm	1590x480mm
機械尺寸 Dimensions of Machinery LxWxH	1485x785x1500mm	1790x855x1500mm
裝箱尺寸 Packing Size LxWxH	1565x865x1650mm	1870x935x1650mm
沖 距 Pressing Distance	20-170mm	20-170mm
淨 重 N.W. (Apr.)	約1240kg	約1570kg
毛 重 G.W. (Apr.)	約1390kg	約1760kg

● 本公司不斷在機械品質和性能上求精進，若有設計變更不再另行通知。

We reserve the right to modify the specifications relating to any of the above listed machines without notice.



FEATURES

● 特點

- 本機採用特殊油壓系統，裁斷力特佳，由4支大鋼柱代替滑軌，永保精密度。
- 裁斷採用雙重壓力，速度快，出力強，無噪音、無震動力。
- 使用內接齒輪泵浦，容積率最高，極靜音。
- 本機設有緊急煞車裝置，可確保人員安全。刀模在裁斷時可設定，簡單、迅速、準確。
- 機台尺寸和沖壓力可由客戶指定訂製。

● Adopting a special hydraulic system, the unit has a strong cutting capacity. The four big steel columns replace conventional sliding rails, accuracy guaranteed.

● Double-pressure cutting ensures fast and powerful performance; noiseless and no vibration force.

● Employing an inner gearing pump, the unit has a big volume, and can perform quietly.

● The emergency brake device guarantees operators' safety. Tools can be preset before cutting; easy, fast and precise.

● Machine measurement and pressure can be custom-made according to customers' requirements.

● 適用 Usage

塑膠地磚、汽車地毯、真空成型、皮革、洋傘、紙板、尼龍、帆布等大型工作物裁斷。

Suitable for cutting

large-sized workpieces such as plastic flooring, auto carpets, vacuum-formed products, leather, umbrella cloths, corrugated card boards, nylon cloths, canvas, etc.

強力四柱式油壓自動送料截斷機

Plane Type Hydraulic Automatic Cutters

精準 · 高品質 / Accurate · High Quality

CSS-706



● 規格 Specifications

型 式 Model	CSS-706	CSS-706A	CSS-706B
壓 力 Pressure	50 tons	70 tons	100 tons
馬 力 Horse Power	5HP	7.5HP	10HP
有效面積 Effective Area LxW	1590x810mm	1590x762mm	1590x914mm
機械尺寸 Dimensions of Machinery LxWxH	2170x810x1650mm	2170x1442x1650mm	2170x1494x1650mm
裝箱尺寸 Packing Size LxWxH	2250x890x1650mm	2250x1542x1650mm	2250x1574x1650mm
沖 距 Pressing Distance	20-180mm	20-180mm	20-180mm
淨 重 N.W. (Apr.)	約3100kg	約3600kg	約4250kg
毛 重 G.W. (Apr.)	約3360kg	約3885kg	約4545kg

● 沖距高低可選購 Height of pressing distance is available upon request.

● 操作可分送料和不送料兩種 Operation with feeding device or unfeeding device is available upon request.



Polaris

CHULIING
Thermoforming and Cutting machine

磊霖機械有限公司/金勝興機械廠
CHU LIING MACHINERY CO., LTD

台灣省彰化縣506福興鄉番社街11-42號
No.11-42, Fan-She Street, Fushin township,
Chunghwa county, Taiwan 506
TEL : 886-4-7795268. 7795269 FAX : 886-4-7794870
<http://www.chuliing.com>
E-MAIL : sales@chuliing.com

經銷商/Agent